Name:	
_	

By writing my name above, I affirm that this test represents my work only, without aid from outside sources. In all aspects of this course I perform with honor and integrity.

Show your work on all of the problems — your approach to the problem is as important as (if not MORE) important than) your final answer.

1) Starting with the unit vector expression for the position, r, of a particle constrained to move in a circle, derive an expression for the magnitude of the velocity vector and the magnitude of the acceleration vector assuming that the particle is moving in **uniform circular motion.** 


Include a picture with the position vector, r, the velocity vector, v, the acceleration vector, a, and the position angle,  $\theta$ , clearly marked.

Clearly state any assumptions required by the proof.

Extra Space for #1


- 2) Multiple Choice, 4 points each.
- 2.1) A piece of mud flies off of the rim of a spinning bicycle wheel. In what direction will it be going after leaving the wheel? (ignore gravity)
  - A) On a line directed away from the center of the wheel.
  - B) On a line tangent to the rim of the wheel.
  - C) On a curved path spiraling outward from the wheel.
  - D) Between the lines described in A and B above.
- 2.2) A sports car collides with a truck. Which experiences the greatest magnitude force during the collision?
  - A) The car
  - B) The truck
  - C) They magnitudes of the forces are the same.
  - D) It depends on their relative speeds
- 2.3) Which experiences the greatest magnitude acceleration?
  - A) The car.
  - B) The truck.
  - C) The magnitudes of their accelerations are the same.
  - D) It depends on their relative speeds.
- 2.4) A mass, m, is pushed with a horizontal force, F, on a horizontal surface but does not move. The coefficient of static friction is  $\mu_s$ . The magnitude of the static friction force on the mass is always
  - a)  $\mu_s$ mg
  - b)  $\mu_s F$
  - c) F
  - d) mg

2.4) A block is accelerating down a rough incline plane. Which is the correct free body diagram?

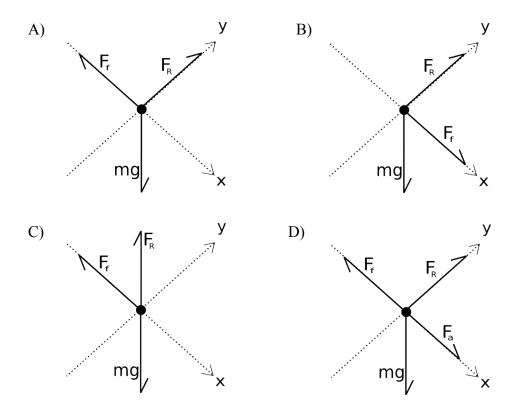


3) Consider the figure shown below. Assume the pulley is massless and frictionless.


$$\theta = 30^{\circ} \\ \alpha = 45^{\circ} \\ \mu_k = 0.10 \\ m_1 = 5.0 \text{ kg} \\ m_2 = 15.0 \text{ kg}$$

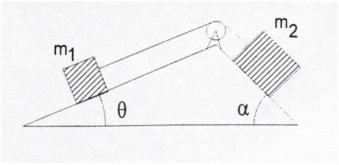

- a) Find an expression (no numbers) for the acceleration of the system.
- b) Plug in the numbers and find the numeric answer.

4) Curves on roadways are often banked so that the reaction force from the road provides part of the centripetal acceleration required to keep the car moving around the circle.





Find an expression for the minimum angle required to keep the car on the road in terms of R, v, and  $\mu_s$ .

5) In the figure shown below all surfaces are frictionless. Find an expression for the the force applied to block  $m_2$  so that block  $m_1$  does not slide down the ramp.

$$\theta = 30^{\circ}$$
 
$$m_1 = 2.0 \text{ kg}$$
 
$$m_2 = 5.0 \text{ kg}$$

